



CURRENT SENSE / LOW OHM
SILICONE COATED TYPE

OFSC SERIES

Hi-POWER CURRENT SENSE RESISTOR
Four Terminal / Negligible Inductances

- 5W and 10W
- Resistance Range
For 5W - R00012 to R002
- For 10W - R0004 to R003
- Flame Retardant Coating




Terminations Hot Dipped
in Solder (65/35) or Pb Free
Plating for RoHS Version





CURRENT
SENSE / LOW
OHM
SILICONE
COATED TYPE
OFSC


PHYSICAL CONFIGURATION

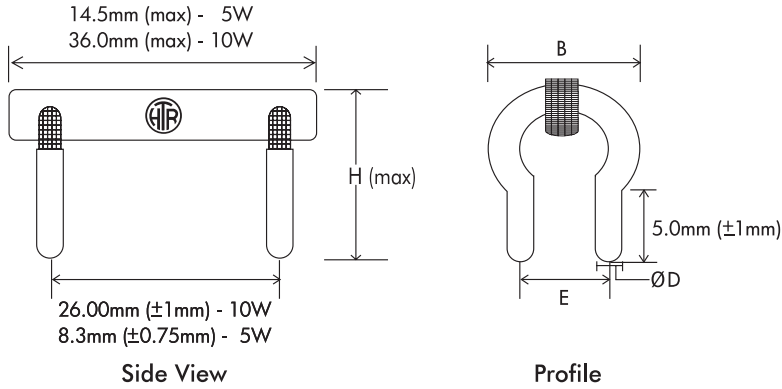

HTR TYPE	POWER RATING at 70°C (AMBIENT)	DIMENSIONS (mm)				RESISTANCE VALUE	TYPICAL WEIGHT PER PC (gms)
		H (max)	Ø D 0.15/-0.1	E ±0.5	B ±1.0		
OFSC-5-012	5W	15.5	2.1	4.5	12.0	R00012	4.8
OFSC-5-015	5W	15.5	2.1	4.5	12.0	R00015	4.8
OFSC-5-02	5W	15.5	2.1	4.5	12.0	R0002	3.8
OFSC-5-03	5W	15.5	2.1	4.5	12.0	R0003	3.5
OFSC-5-04	5W	13.0	1.6	3.1	9.6	R0004	2.2
OFSC-5-05	5W	13.0	1.6	3.1	9.6	R0005	2.0
OFSC-5-06	5W	13.0	1.6	3.1	9.6	R0006	1.7
OFSC-5-07	5W	13.0	1.6	3.1	9.6	R0007	1.6
OFSC-5-08	5W	13.0	1.6	3.1	9.6	R0008	1.5
OFSC-5-09	5W	13.0	1.6	3.1	9.6	R0009	1.5
OFSC-5-1	5W	13.0	1.6	3.1	9.6	R001	1.5
OFSC-5-2	5W	13.0	1.6	3.1	9.6	R002	1.4
OFSC-10-04	10W	16.0	2.1	6.4	11.5	R0004	9.8
OFSC-10-05	10W	16.0	2.1	6.4	11.5	R0005	8.0
OFSC-10-1	10W	16.0	2.1	6.4	11.5	R001	6.9
OFSC-10-125	10W	14.5	2.1	6.4	11.5	R00125	5.95
OFSC-10-15	10W	14.5	2.1	6.4	11.5	R0015	5.0
OFSC-10-16	10W	14.5	2.1	6.4	11.5	R0016	4.8
OFSC-10-2	10W	14.5	2.1	6.4	11.5	R002	4.2
OFSC-10-25	10W	14.5	2.1	6.4	11.5	R0025	4.2
OFSC-10-3	10W	14.5	2.1	6.4	11.5	R003	2.8

- Current Rating : Upto 160amps under certain conditions and diameter of terminals used (please check with factory for details).
- Due to availability of different resistance alloys, it is sometimes possible to offer these resistors with alternatives mounting pitches (please check with factory for details).

DERATING CURVE

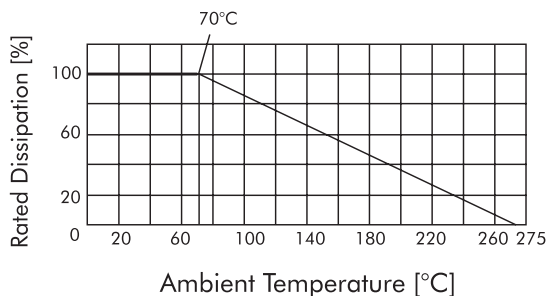



CURRENT
SENSE / LOW
OHM
SILICONE
COATED TYPE
OFSC

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS / DATA

Parameter / Performance Test	Test Method / Condition	Performance Requirement
Resistance Tolerance	No : 303 of MIL 202 F	± 5% (J); ± 3% (H); ± 2% (G) ± 1% (F) + 1.5%
Power Rating	Full power dissipation at upto 70°C and linearly derated down to zero dissipation at 275°C (see derating curve above)	5W/10W (70°C)
Ambient Operating Temperature Range	-55°C to +275°C	-55°C to +275°C (Suitably directed as per derating curve shown above)
Voltage Rating / Limiting Voltage / Max Working Voltage	\sqrt{PxR}	5 W - Temperature on body / termination } <120°C / 75°C 10W - Temperature on body / termination } < 220°C/ 90°C
Short time Overload	1) 10 x Power Rating for 5 secs - For 10W 2) 5 x Power Rating for 5 secs - For 5W	$\Delta R \pm < 0.75\%$ (typical) $\Delta R \pm < 0.35\%$ (typical)
Inductance		< 10 nH
Temperature Co-efficient Of Alloy Utilized	No: 304 (20°C - 60°C) of MIL 202 F	Closer to 1000 ppm / °C
Thermal Shock	Limiting voltage applied until temperature stabilizes & then placed in cold temperature -55°C for 15 minutes	$\Delta R < 0.3\%$ (typical)
Damp Heat (Steady State)	No : 103 B of MIL 202 F and test condition "D"	$\Delta R < 0.5\%$
Solderability	No : 208 F of MIL 202 F	Continuous and Satisfactory
Load Life	No: 108 A of MIL 202 F	$\Delta R < 1.5\%$ (typical)

TYPICAL APPLICATIONS

The OFSC series offers a PCB mounted, non-inductive resistor having high stability / overload capacity. The unique 4 termination design serves the purpose of eliminating the inherent resistance of the leads. This makes the resistor highly accurate in current sensing operations. The resistor is finding widespread acceptance among inverter / UPS manufacturers.

ORDERING INFORMATION

Series	Type	Packing	Resistance Value	Tolerance
OFSC	OFSC-10-2/ OFSC-10-2*	Bulk OFSC-10-2 OFSC-10-2*	R002	J

1. For RoHS version - OFSC-10-2 *