
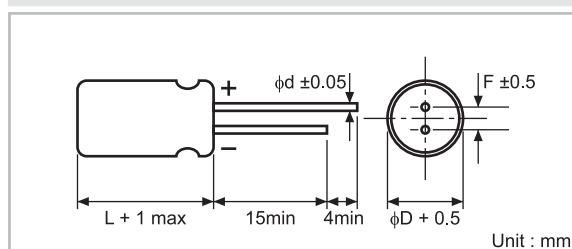


**TM Series****5mmL(高), Standard(標準品)****SAMXON®****FEATURES**

1. Designed for space-saving and high density insertion.
2. 4WV products are standardized for recent battery power source devices.
3. Low price compared to tantalum capacitors.
4. Application: VTR, camera, car audio, mini-audio set, OA related equipment and other industrial and commercial applications.

**SPECIFICATIONS**

Item	Performance Characteristics							
Operating Temperature Range	-40 to +85°C							
Rated Working Voltage Range	4 to 50V							
Nominal Capacitance Range	0.1 to 330μF							
Capacitance Tolerance	±20% (120Hz, +20°C)							
Leakage Current	I ≤ 0.01CV or 3(μA) whichever is greater measured after 2 minutes application of rated working voltage at +20°C							
Dissipation Factor tan δ (120Hz, +20°C)	Working Voltage (V)	4	6.3	10	16	25	35	50
	tan δ (max.) φ3	0.40	0.38	0.30	0.23	0.17	0.15	0.13
	φ4 - φ8	0.35	0.24	0.20	0.16	0.14	0.12	0.10
Low Temperature Characteristics	Impedance ratio max. at 120Hz							
	Working Voltage (V)	4	6.3	10	16	25	35	50
	Z-25°C / Z+20°C	7	4	3	2	2	2	2
	Z-40°C / Z+20°C	15	8	6	4	4	3	3
High Temperature Loading	Test conditions Duration : 2000 hours Ambient temp. : +85°C Applied voltage : Rated DC working voltage				Post test requirements at +20°C Leakage current : ≤ Initial specified value Cap. change : within ±20% of initial measured value (4V: within ±30%) tan δ : ≤ 200% of initial specified value			
Shelf Life	Test conditions Duration : 1000 hours Ambient temp. : +85°C Applied voltage : (None)				Post test requirements at +20°C Same limits for high temperature loading.			
Others	JIS C - 5141 JIS C - 5102							

**CASE SIZE TABLE**

φD	3	4	5	6.3	8			
F	1.0	1.5	2.0	2.5	2.5			
φd	0.4		0.45					

**RIPPLE CURRENT MULTIPLIER**

Temperature Coefficient					Frequency Coefficient						
Temperature(°C)	~ 55	60	70	85	Cap(μF)	Freq.(Hz)	50	120	300	1K	10K ~
Factor	1.65	1.50	1.30	1.00		≤ 47	0.75	1.00	1.35	1.57	2.00
						47 ~ 330	0.80	1.00	1.23	1.34	1.50

## 5mmL(高), Standard(標準品)

## DIMENSIONS

Voltage (Code)		4V (0G)		6.3V (0J)		10V (1A)		16V (1C)	
Cap.(μF)	Code	Case Size	Ripple Current						
0.1	104								
0.22	224								
0.33	334								
0.47	474								
1	105								
2.2	225								
3.3	335								
4.7	475							3 x 5	10
10	106			3 x 5	15			4 x 5	23
22	226	3 x 5	19	4 x 5	28	5 x 5	33	5 x 5	37
33	336	4 x 5	28	5 x 5	37	5 x 5	41	6.3 x 5	49
47	476	4 x 5	33	5 x 5	45	6.3 x 5	52	6.3 x 5	58
100	107	5 x 5	56	6.3 x 5	70	8 x 5	80	8 x 5	92
220	227	6.3 x 5	96	8 x 5	110	8 x 5	135		
330	337	8 x 5	145						

Maximum Allowable Ripple Current (mA rms) at 85°C 120Hz

Case Size φD x L(mm)

Voltage (Code)		25V (1E)		35V (1V)		50V (1H)			
Cap.(μF)	Code	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	Ripple Current		
0.1	104					4 x 5 (3 x 5)	1.0		
0.22	224					4 x 5 (3 x 5)	2.0		
0.33	334					4 x 5 (3 x 5)	2.8		
0.47	474					4 x 5 (3 x 5)	4.0		
1	105					4 x 5 (3 x 5)	8.4		
2.2	225			3 x 5	8.4	4 x 5	13		
3.3	335	3 x 5	10	4 x 5	15	4 x 5	17		
4.7	475	4 x 5	16	4 x 5	18	5 x 5	20		
10	106	5 x 5	27	5 x 5	29	6.3 x 5	33		
22	226	6.3 x 5	42	6.3 x 5	46	8 x 5	52		
33	336	6.3 x 5	52	8 x 5	62	8 x 5	71		
47	476	8 x 5	70	8 x 5	80				
100	107	8 x 5	110						
220	227								
330	337								

Maximum Allowable Ripple Current (mA rms) at 85°C 120Hz

Case Size φD x L(mm)