




#### SOT-23 Formed SMD Package

CMBD914


#### HIGH SPEED SWITCHING DIODE

*Marking CMBD914 = 5D* 





- 1 = ANODE 2 = NC
- 3 = CATHODE




ABSOLUTE MAXIMUM RATINGS	17-		75	V
Continuous reverse voltage	$V_R$			•
Forward current	$I_F$		200	mA
Peak forward surge current	I <sub>FM</sub> (surge)	)	500	mA
<b>RATINGS</b> (at $T_A = 25$ °C, unless otherwise specified	fied)			
Total Power Dissipation, $T_A = 25 \ ^{\circ}C$	$P_d^*$		225	mW
Storage Temperature	T <sub>stg</sub>	–55 ta	+150	° C
THERMAL RESISTANCE				
From junction to ambient	Rth j-a		556	°C/W
CHARACTERISTICS (at TA = 25 °C, unless other	rwise specifie	d)		
Reverse breakdown voltage				
$I_R = 100 \ \mu A$	$V_{BR}$	min.	100	V
Reverse voltage leakage current				
$V_R = 20 V$	$I_R$	max.	25	nA
$V_R = 75 V$	$I_R$	max.	5	$\mu A$

\* FR-5 Board =  $1.0 \times 0.75 \times 0.62$  in.

Diode capacitance			
$V_R = 0; f = 1 MHz$	$C_D$	max.	4 pF
Forward voltage			
$I_F = 10 mA$	$V_F$	max.	1 V
Reverse recovery time			
$I_F = I_R = 10 \ mA$	t <sub>rr</sub>	max.	4 nsec.


**SOT-23** Formed SMD Package

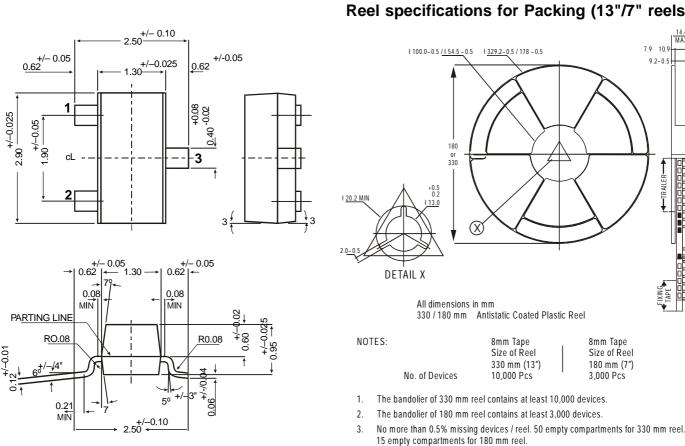

#### 4. Three consecutive empty places might be found provided this gap is followed by 6 consecutive devices.

5. The carrier tape (leader) starts with at least 75 empty positions (equivalent to 330 mm). In order to fix the carrier tape a self adhesive tape of 20 to 50 mm is applied. At the end of the bandolier at least 40 empty positions (equivalent to 160 mm) are there.

### **Tape Specification for SOT-23 Surface Mount Device**

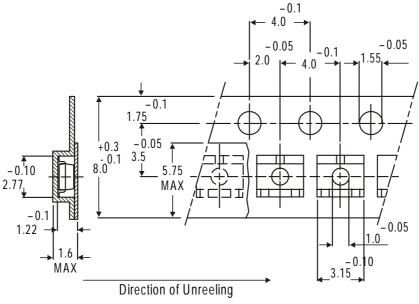

All dimensions in mm

## SOT-23 Formed SMD Package

Continental Device India Limited

# **SOT-23 Package Reel Information** Reel specifications for Packing (13"/7" reels)

# Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
SOT-23 T&R	3K/reel		3" x 7.5" x 7.5" 9" x 9" x 9"	12.0K 51.0K	17" x 15" x 13.5" 19" x 19" x 19"	192.0K 408.0K	12 kgs 28 kgs
	10K/reel	415 gm/10K pcs	13" x 13" x 0.5"	10.0K	17" x 15" x 13.5"	300.0K	16 kgs

# **Customer Notes**

#### **Component Disposal Instructions**

- 1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
- 2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

#### Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of Continental Device India Limited C-120 Naraina Industrial Area, New Delhi 110 028, India. Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119 email@cdil.com www.cdilsemi.com